

INSULHOLD

Your reputation will stand because your insulation won't fall.


* Architects *

* Building Supplies *

* Contractors *

* Home Owners *

- A NEW CONCEPT in insulation efficiency. Now a product insuring against heat and sound loss caused by sagging insulation.

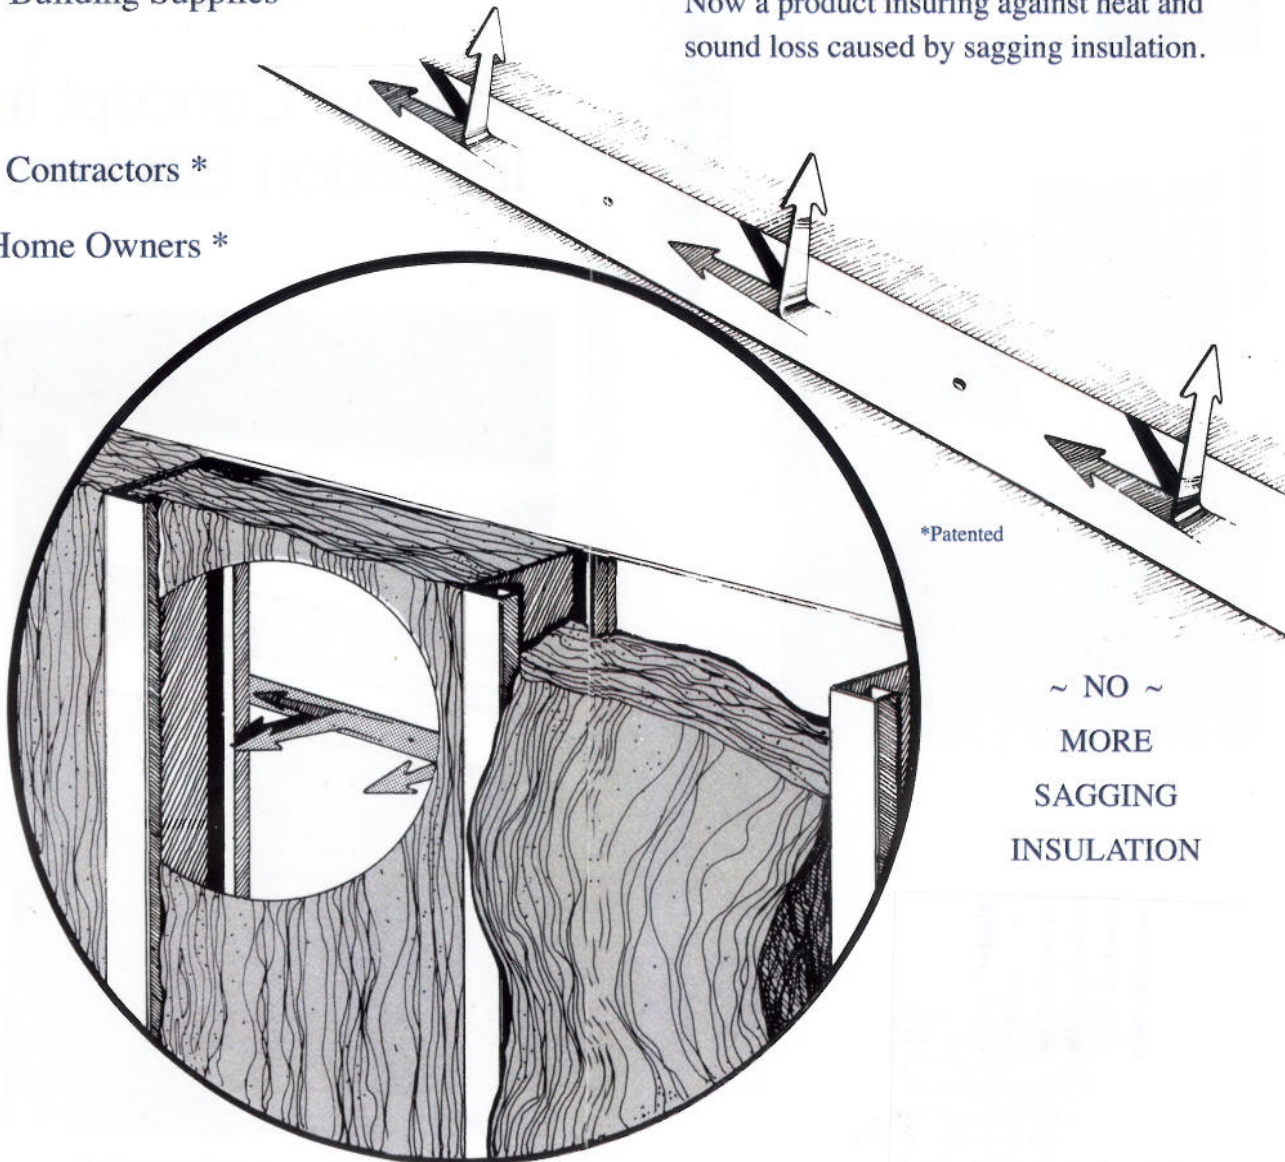

~ NO ~
MORE
SAGGING
INSULATION

INSULHOLD

- Fabricated of heavy 20 gauge galvanized metal.

For use with mot types of insulation in any width or thickness.

- Fiberglass, Styrofoam
- New and Existing Buildings
- Cement Block Walls
- Metal Studs
- Cement Slabs

COST EFFECTIVE

INSULHOLD's unique design simplifies installation and doubles as reinforcement strapping

EASY INSTALLATION

1. INSULHOLD may be attached to existing wall or framing
2. Use appropriate fasteners for the type of construction (nails, self-tapping screws, masonry nails.)
3. Install 6" down from top of insulation and every (4ft.) horizontally.
4. If insulation is installed in less than full length sheets, install INSULHOLD at each seam.
5. Available in approximately 100' rolls, averaging 13 lbs.

