


1531CW®

FOIL INSULATION TAPE

A tri-directionally reinforced, UL listed metalized polypropylene/ scrim/kraft laminated UV stable facing tape coated with a special cold weather acrylic pressure sensitive adhesive system. Combining superior quick stick at normal temperatures with superior low temperature performance down to 10°F, this is the ultimate in cold weather tapes. Also recommended for use at elevated temperatures.

Product Construction

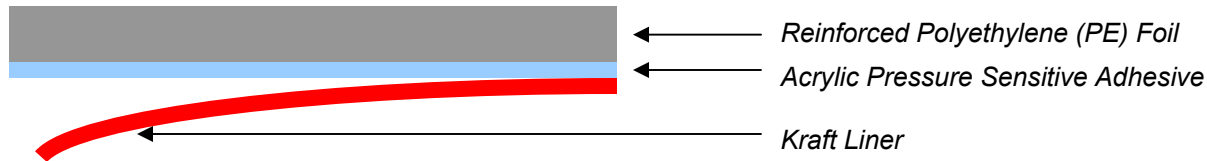

Features & Benefits

- Primarily used as a closure system and vapor seal on Lamtec WMP®-10 faced thermal insulation.
- Aggressive acrylic adhesive has excellent quick stick and performs well over a wide temperature range
- Hand tearable allows for easy installation
- Excels in high heat humidity environmental conditions
- In stock product available for immediate delivery

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness (Total)	7.0 mils	178.0 µm	PSTC-133
Peel Adhesion	68 oz/in	18.9 N/25mm	PSTC-101
Tensile Strength	40 lb/in width	178 N/25mm width	PSTC-131

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- 3, 5" (7.6, 12.7 cm) standard width x 46, 91 m
- Custom widths and lengths available, contact Venture Tape for specifications and requirements

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

www.boma.it

VentureTape®



USA

Venture Tape Corp.
30 Commerce Road
Rockland, MA 02370
781-331-5900
FAX 781-871-0065

Europe – Venture Tape

Venture Tape Europe Corp.
Units 5 – 6, Faraday Close,
Drayton Fields, Daventry,
Northamptonshire, England NN11 8RD
(0) 1327 876555
FAX (0) 1327 876444

Australasia

Venture Tape Australasia, Pty., Ltd.
11B Production Drive
Campbellfield 3061 Victoria
Australia
(03) 9357 6025
FAX (03) 9357 6045